

JUMPER WIRE

APPLICATION:

Use to interconnect the components of a breadboard or prototype or test circuit, internally or with other equipment or components, without soldering.


SPECIFICATION:

- Customer specification

CONSTRUCTION/SPECIAL FEATURES:

- Soft Drawn Copper wire
- Thermoplastic PVC Lead free 75°C insulated
- Flame retardant
- Heat and Oil resistant

JUMPER WIRE

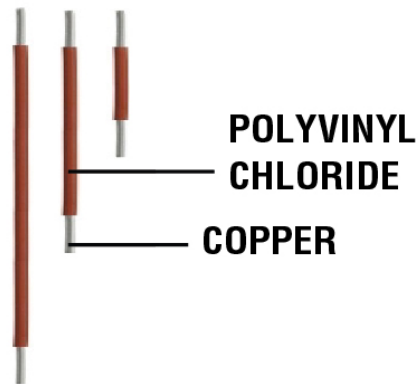

COLOR:

- As per Customer Order

JUMPER WIRE TECHNICAL DATA

Customer no.	Size	Approximate Over All Diameter (mm)	Approximate Cable Weight (kg/km)	Standard Length
Commercial	0.50mm x 2c	2.22	5.971	150m/coiled