

TELEPHONE JACKETED WIRE

APPLICATION:

- For Interconnecting of Internal telephone switching

SPECIFICATION:

- Commercial specs


CONSTRUCTION/SPECIAL FEATURES:

- Soft Drawn Copper wire
- Thermoplastic PVC Lead free 75°C insulated
- Jacketed with thermolastic PVC Lead free 60°C
- Flame retardant and Moisture resistant

COLOR:

- Insulation
 - 2C - Black & Red
 - 3C - Black, Red & White
 - 4C - Black, Red, White & Green
- Jacket
 - 2C - Brown
 - 3C - Brown
 - 4C - Gray

**TELEPHONE JACKETED WIRE
(FOUR CONDUCTORS)**

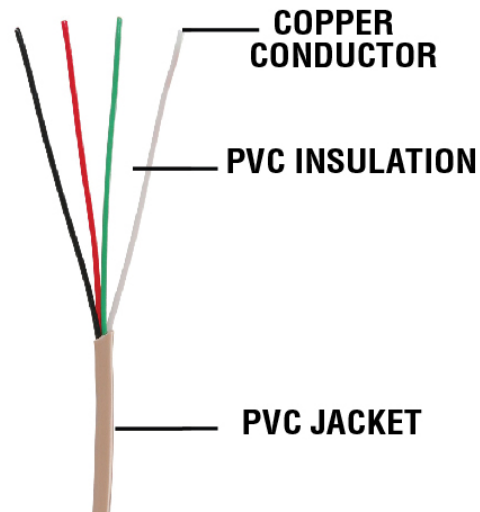

TELEPHONE JACKETED WIRE TECHNICAL DATA

Size		Approximate Over All Diameter (mm)	Approximate Cable Weight (kg/km)	Standard Length
AWG	(mm ²)			
22	0.65 x 2C	3.57	15.05	150m/ coil
	0.65 x 3C	3.78	20.118	150m/ coil
	0.65 x 4C	3.387	25.526	150m/ coil

***Note:** PHILFLEX will accept Telephone Jacketed Wire customer specifications.