

AV CABLE (50 Volts, 80°C)

APPLICATION:

•


Used in surface vehicle electrical systems not exceeding 50 Volts Direct Current and a temperature not exceeding 80°C in dry & wet position.

SPECIFICATION:

- PNS 260
- PNS 261

CONSTRUCTION/SPECIAL FEATURES:

- Soft annealed bunched Copper wire
- Thermoplastic PVC Lead free 80°C insulated
- Flame retardant
- Good flexibility and Abrasion resistant
- Heat and Oil resistant

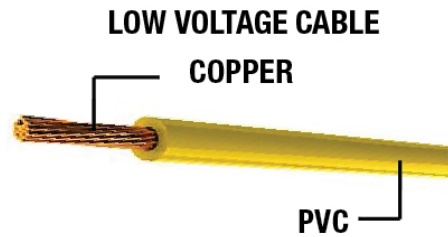

COLOR:

- Black, White, Red, Green, Yellow, Brown, Blue

Size (mm ²)	Approximate Over All Diameter (mm)	Approximate Cable Weight (kg/km)	Standard Length
0.50	2.20	9.478	30m/ spool
0.75	2.40	11.836	30m/ spool
0.85	2.40	12.942	30m/ spool
1.25	2.70	17.409	30m/ spool
2.0	3.10	25.795	30m/ spool
3.0	3.80	39.786	30m/ spool
5.0	4.60	61.253	30m/ spool
8.0	5.50	90.973	30m/ spool