

CONTROL CABLE 600 Volts

APPLICATION:

- Use for operation and interconnection of protective devices and for general use maximum circuit voltage rating 600 volts.

SPECIFICATION:


- PNS 1207
- ICEA S-73-532

CONSTRUCTION/SPECIAL FEATURES:

- Soft Drawn Stranded Concentric Conductors
- Thermoplastic PVC Lead free 75°C Insulated
- Tapping with Mylar tape thickness 0.027 mm applied helically with minimum overlap of 10%
- Thermoplastic PVC Lead free 60°C Sheated

COLOR:

- **4C COLOR CODED:**
 - Black, White, Red, Green
- **8C SEQUENCE:**
 - 1, 2, 3, 4, 5, 6, 7, 8, white
- **SHEATHED:** Black

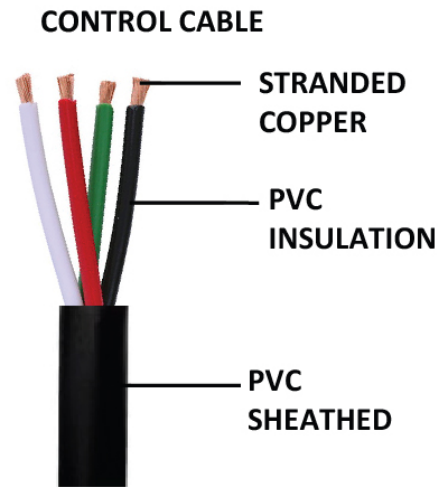

CONTROL CABLE TECHNICAL DATA

Size		Approximate Over All Diameter (mm)	Approximate Cable Weight (kg/km)	Approximate Over All Diameter (mm)	Approximate Cable Weight (kg/km)
AWG	mm ²	4 CONDUCTORS		8 CONDUCTORS	
16	1.25	9.68	138.722	12.80	231.374
14	2.0	12.23	212.885	17.22	387.035
12	3.5	14.44	321.709	19.29	545.336

Note: PHILFLEX also accept order for Multi conductors Control Cable 600 volts with more than 8 conductors, shielded or non-shielded cables or as per customer request.